




COMBICONNECT

FLEXIBLE PVC DUCT

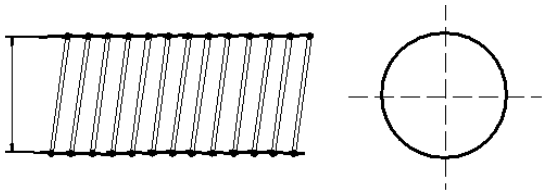

DIMENSIONES: 127 mm 10 m

DESCRIPTION:

- **User-Friendly Installation:** Easily attaches to both circular and oval connections, ensuring a secure fit and preventing air leaks.
- **Durable and Safe:** Made with double-layer flame retardant aluminum foil and 304 stainless steel spiral wires, enduring temperatures from 18°C to 85°C.
- **Flexible and Efficient:** 4-inch diameter pipe can be compressed to 10 meters and allows 90-degree bending, with anti-rust metal clamps ensuring airtightness of 300 Pa.
- **Quick and Easy Setup:** Reduces installation time by 80% in narrow spaces compared to rigid air ducts.
- **Versatile Solutions:** Ideal for CO₂ circulation in greenhouses, heat dissipation in computer rooms, and moisture removal in bathrooms, offering ready-to-use installation solutions.

SPECIFICATIONS

Product	120-026
Reference	631114
Product Size	φ102mm x 10m
Material	Aluminum foil + PVC

PACKAGING

Gross Weight (KGS)	1.9 KGS
Net Weight (KGS)	1.6 KGS
Carton Dimension	12.5 *12.5 * 52 cm
QTY	1 PCS/CTN

