



DOUBLED ENDED LAMP INSTALLATION

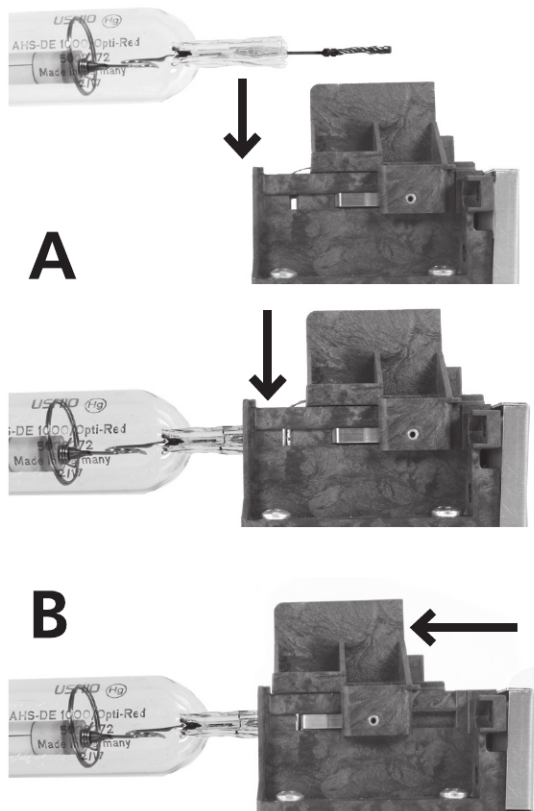


Insert lamp ends into sockets (A).

Make sure that it has been properly locked in place by sliding the socket towards the middle of the fixture (B). This prevents the lamp from falling out.

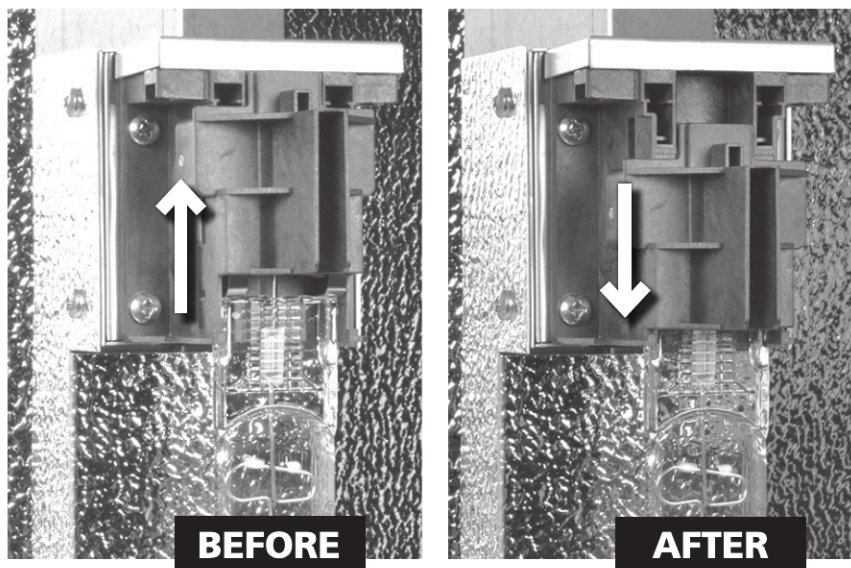


NOTE: These lamps have a quartz jacket. Fingerprints and oils must be wiped off prior to operation.

DOUBLED ENDED LAMP INSTALLATION

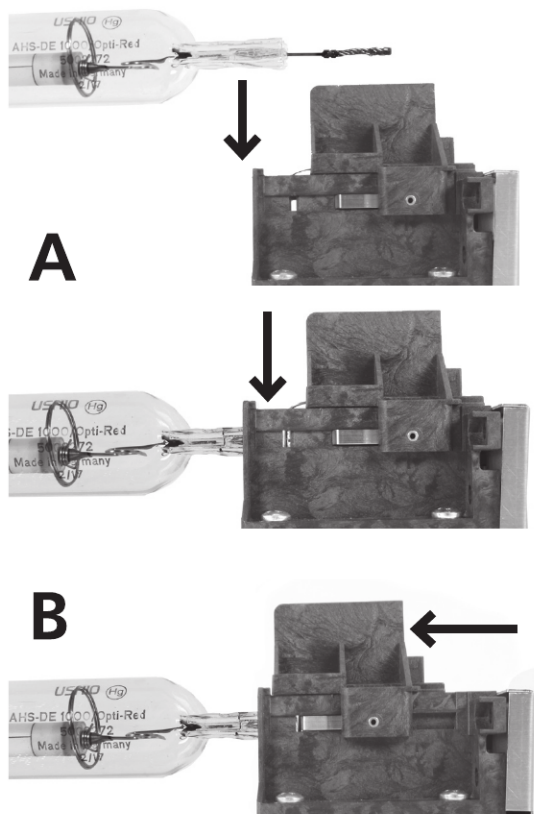

Insert lamp ends into sockets (A).

Make sure that it has been properly locked in place by sliding the socket towards the middle of the fixture (B). This prevents the lamp from falling out.

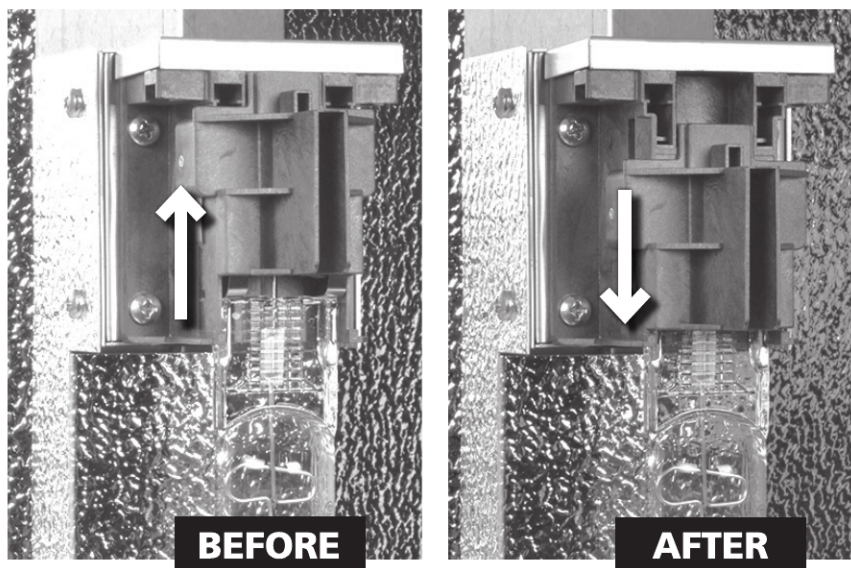

NOTE: These lamps have a quartz jacket. Fingerprints and oils must be wiped off prior to operation.