


SPECIFICATIONS


PPF:	> 1700 $\mu\text{mol/s}$
Efficacy:	> 2.7 $\mu\text{mol/J}$
Input Power:	630 W
Power Factor:	$\geq 90\%$
Fixture Dimensions/Weight:	45"L x 44.6" W x 4.44" H / 38.8 lbs
Mounting Height:	> 6" (15.2cm) Above Canopy
Lifetime:	L90 : > 54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 100-277 V
Amp Draw:	120V/5.24A, 208V/3.16A 240V/2.67A, 277V/2.35A
Group Control:	YES

DIMENSIONS

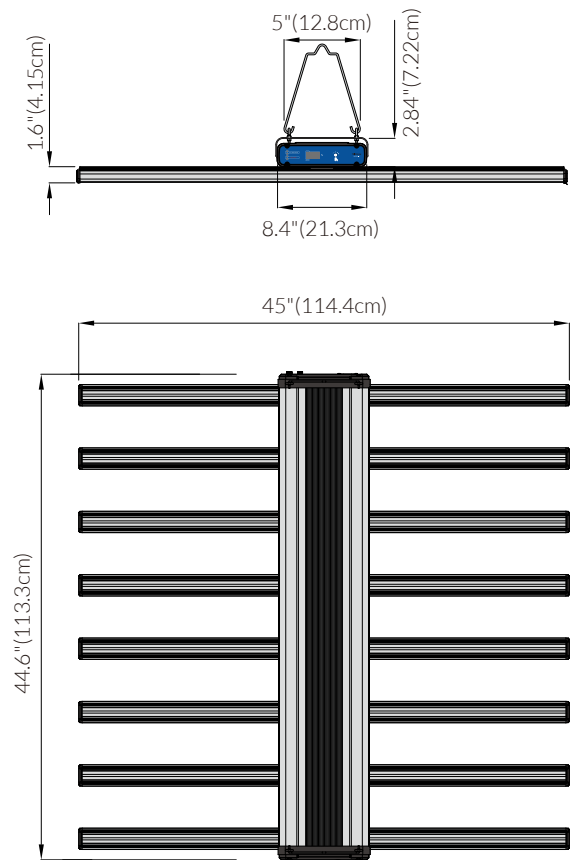


MODEL-H (Tested at 6" / Tested at 12")

Average PPFD 1079/ 904

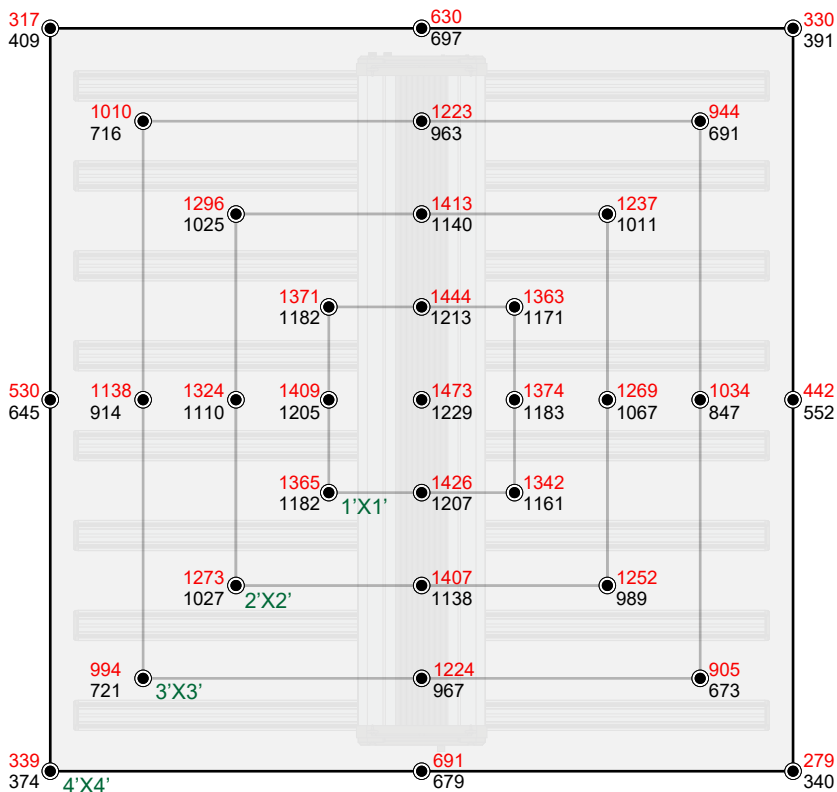


ADJUSTABLE SPECTRUM

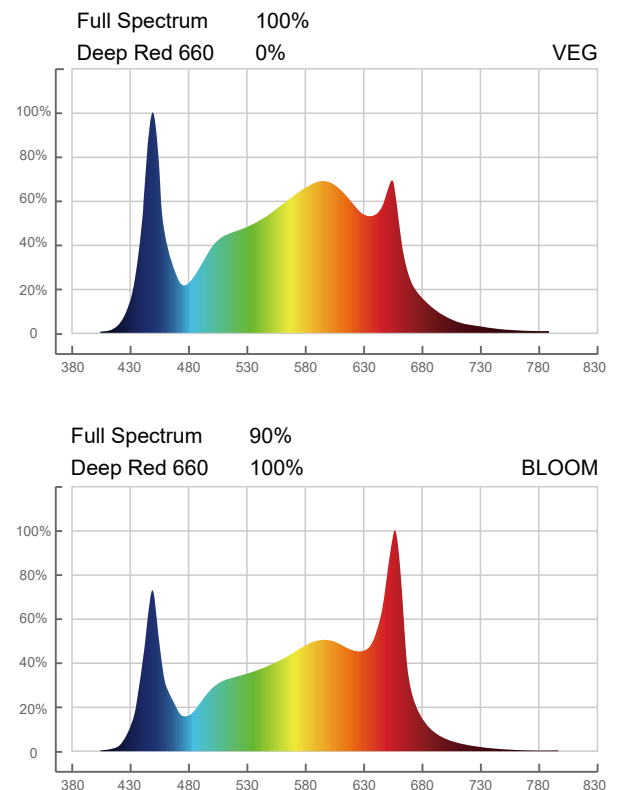

SPECIFICATIONS


PPF:	1700 $\mu\text{mol/s}$
Efficacy:	2.7 $\mu\text{mol/J}$
Input Power:	630 W
Power Factor:	$\geq 90\%$
Fixture Dimensions/Weight:	45"L x 44.6" W x 4.44" H / 38.8 lbs
Mounting Height:	> 6" (15.2cm) Above Canopy
Lifetime:	L90 : > 54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 347-480V
Amp Draw:	347V/2.07A, 480V/1.62A
Group Control:	YES

DIMENSIONS

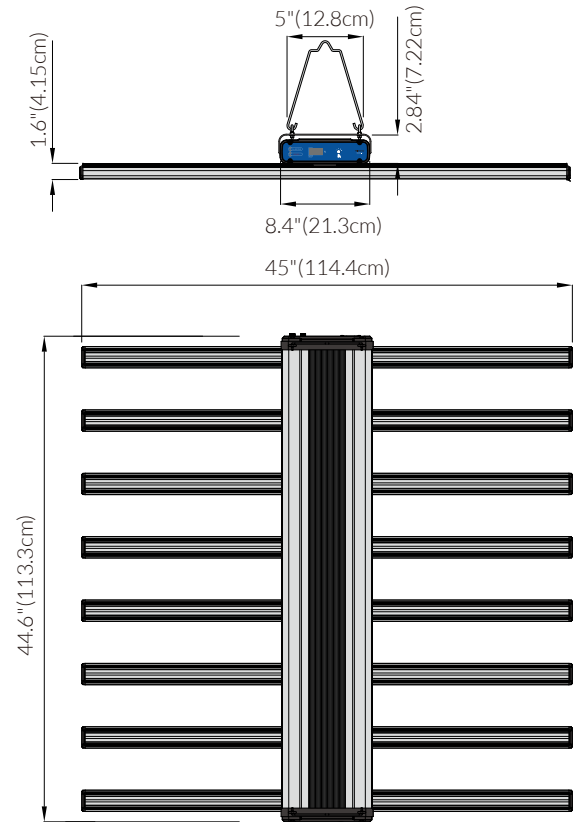

MODEL-H (Tested at 6" / Tested at 12")

Average PPFD 1079/ 904

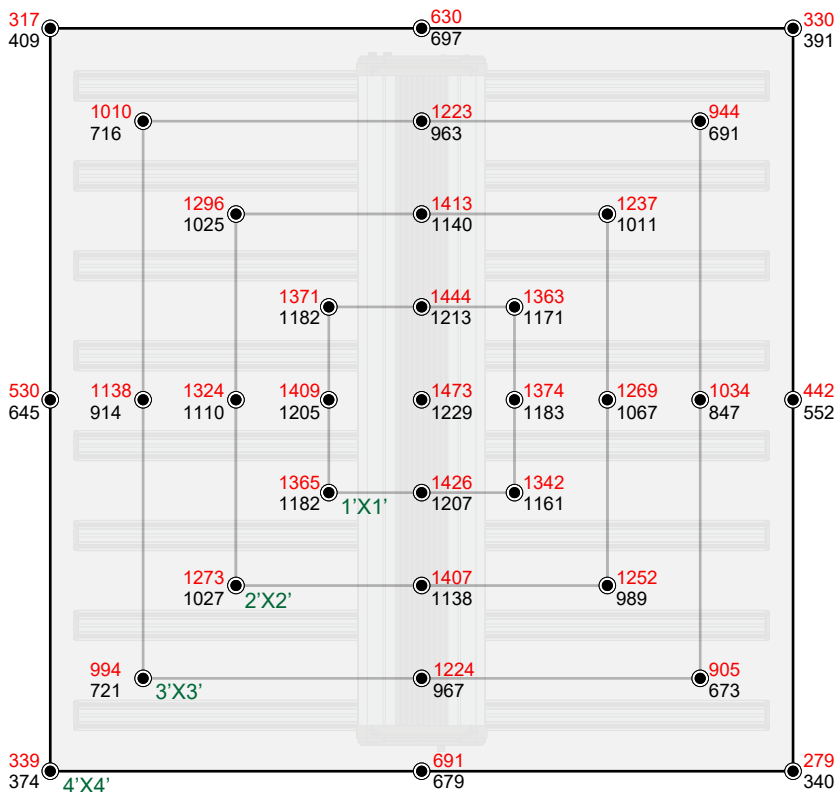

ADJUSTABLE SPECTRUM

